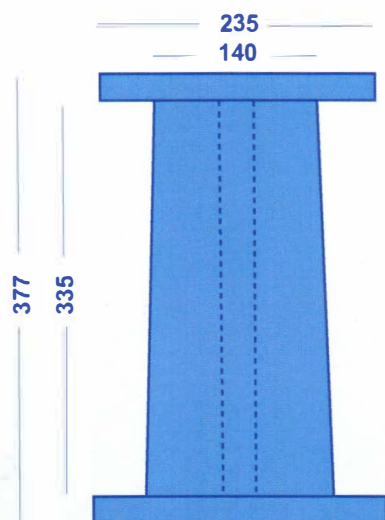
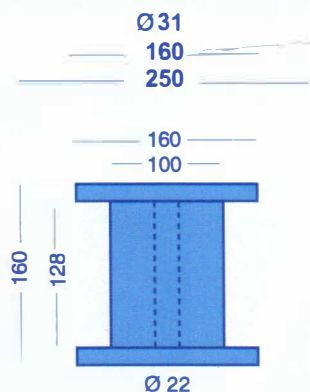





DIN 250 K

- PA6 net weight g. 6200
- PET net weight g. 7500
- ▲ PP net weight g. 4900




DIN 160

- PA 6 net weight g.1000
- PET net weight g.1250
- ▲ PP net weight g. 800



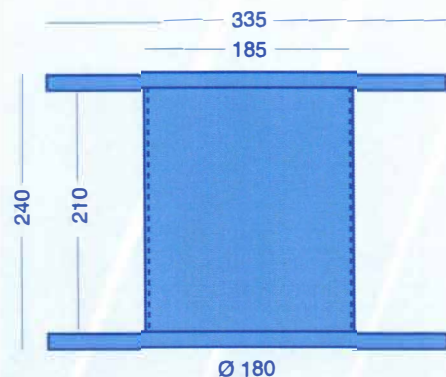
DIN 200

- PA6 net weight g. 2000
- PET net weight g. 2500
- ▲ PP net weight g. 1700



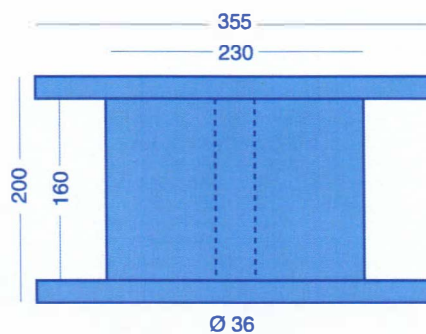
DIN 250

- PA6 net weight g. 3000
- PET net weight g. 3600
- ▲ PP net weight g. 2500



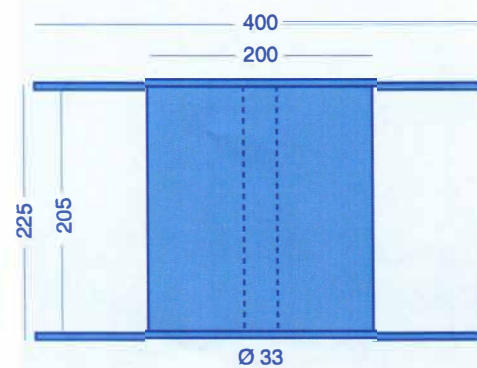
DIN 335

- PA6 net weight g. 8000
- PET net weight g. 10000



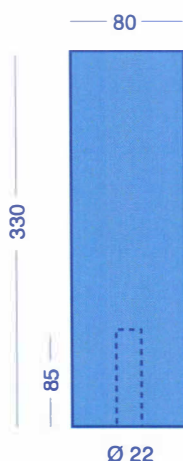
DIN 355

- PA6 net weight g. 6500
- PET net weight g. 8000
- ▲ PP net weight g. 5200

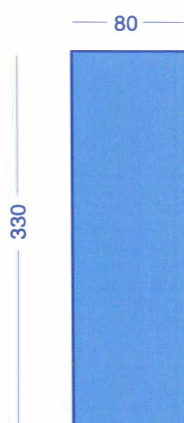


DIN 400

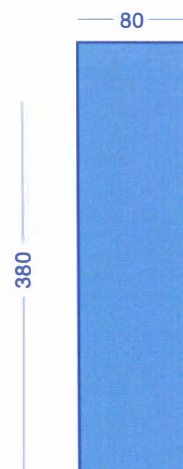
- PA6 net weight g. 12000
- PET net weight g. 15000


TUBO 330


■ PA 6	net weight	g. 850
● PET	net weight	g. 1000
▲ PP	net weight	g. 700


T 330 open


■ PA 6	net weight	g. 850
● PET	net weight	g. 1000
▲ PP	net weight	g. 700


T 380 open

■ PA 6	net weight	g. 1000
● PET	net weight	g. 1250
▲ PP	net weight	g. 850


R 400


■ PA 6	g. 400
● PET	g. 500


KS


■ PA 6	g. 227
--------	--------


DYEING CONE

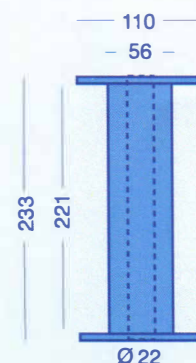
■ PA 6	g. 800
● PET	g. 800


R 600

■ PA 6	g. 560
● PET	g. 650


R 800

■ PA 6	g. 800
● PET	g. 900


R 800 L

■ PA 6	g. 1000
● PET	g. 1250